

Rechargeable Sealed Lead-Acid Battery

PS-640

6 Volt 4.5 Amp. Hrs.



Features:


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Rugged impact resistant case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS

Nominal Voltage	6 volts (3 cells in series)
Nominal Capacity	
20 hour rate (225mA to 5.25 volts).....	4.50 A.H.
10 hour rate (410mA to 5.25 volts).....	4.10 A.H.
5 hour rate (650mA to 5.10 volts).....	3.20 A.H.
1 hour rate (2.75A to 4.50 volts).....	2.75 A.H.
15 min rate (9.00A to 4.50 volts).....	2.25 A.H.
Approximate Weight	1.80 pounds (0.82 kg)
Energy Density (20 hour rate)	1.37 Watt-hours/cubic inch (83.9 Watt-hours/l)
Specific Energy (20 hour rate)	15.3 Watt-hours/pound (33.7 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	16 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	13.8 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	46 amperes
Terminals	“F1”:: Quick disconnect tabs, 0.187" x 0.032"- Mate with AMP. INC. FASTON “187” series
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	ABS Plastic


Shelf Life and Storage

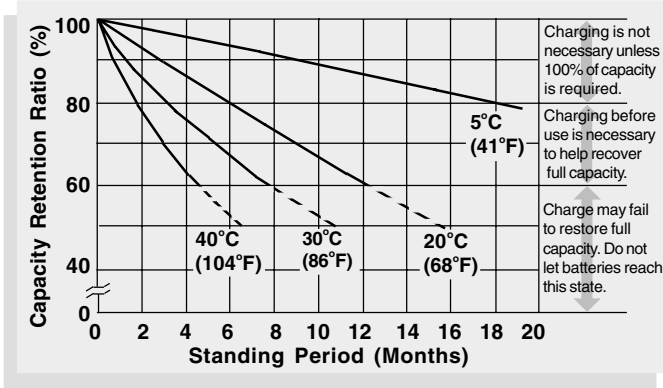


Discharge Characteristics

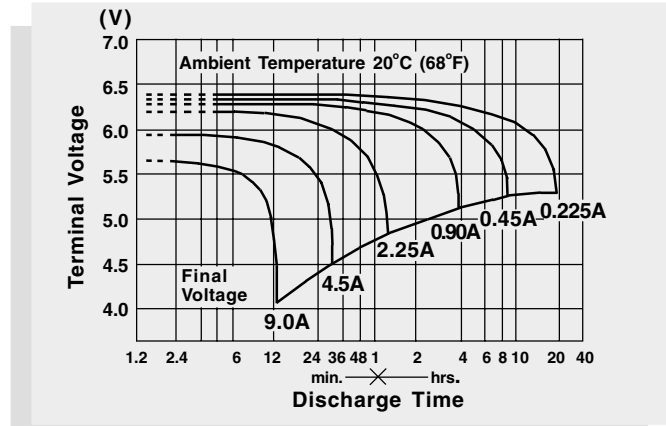


Life Characteristics in Stand-By Use

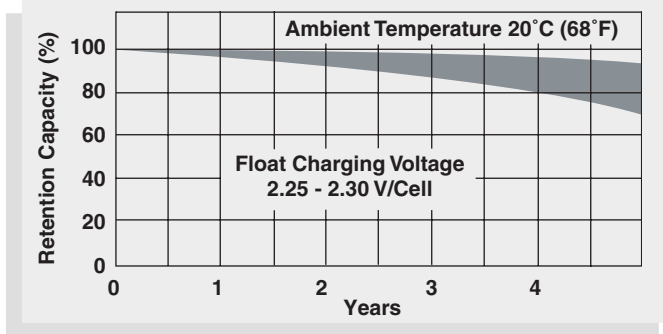

Discharge Time vs. Discharge Current

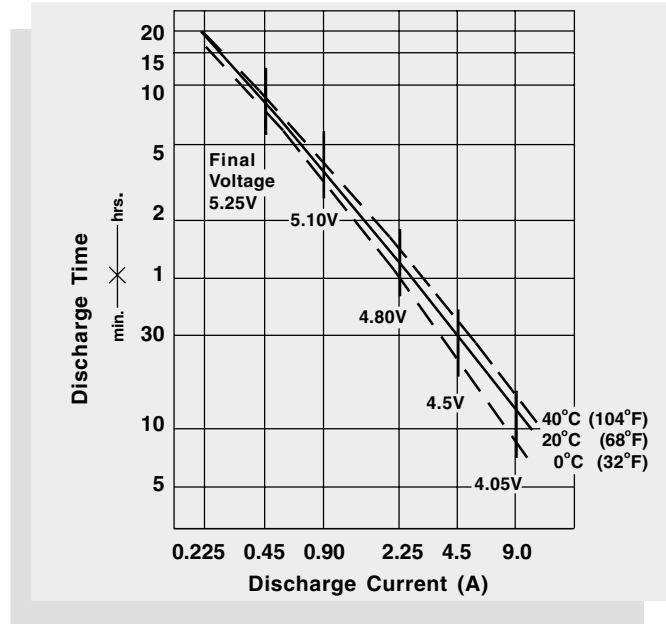

Life Characteristics in Cyclic Use

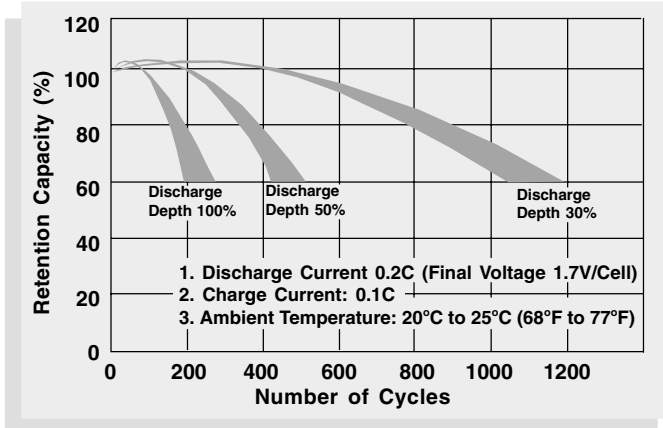


CHARGING

Cycle Applications: Limit initial current to 1.35A. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to approximately 45mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.



NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Physical Dimensions



Terminals

"F1" FASTON
 0.187" x 0.032"
 quick disconnect tabs.



Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.



CORPORATE OFFICE
 7550 Panasonic Way
 San Diego, CA 92154 USA
 Tel: +1-619-661-2020
 Fax: +1-619-661-3650
 national-sales@power-sonic.com

CUSTOMER SERVICE
 Tel: +1-619-661-2030
 Fax: +1-619-661-3648
 customer-service@power-sonic.com

SALES / INTERNATIONAL
 Tel: +1-650-364-5001
 Fax: +1-650-366-3662
 battery@power-sonic.com

www.power-sonic.com